



Follow these steps when applying Z1 no snag tags™ using the tag loader




Knowing your Z1 no snag tagger™

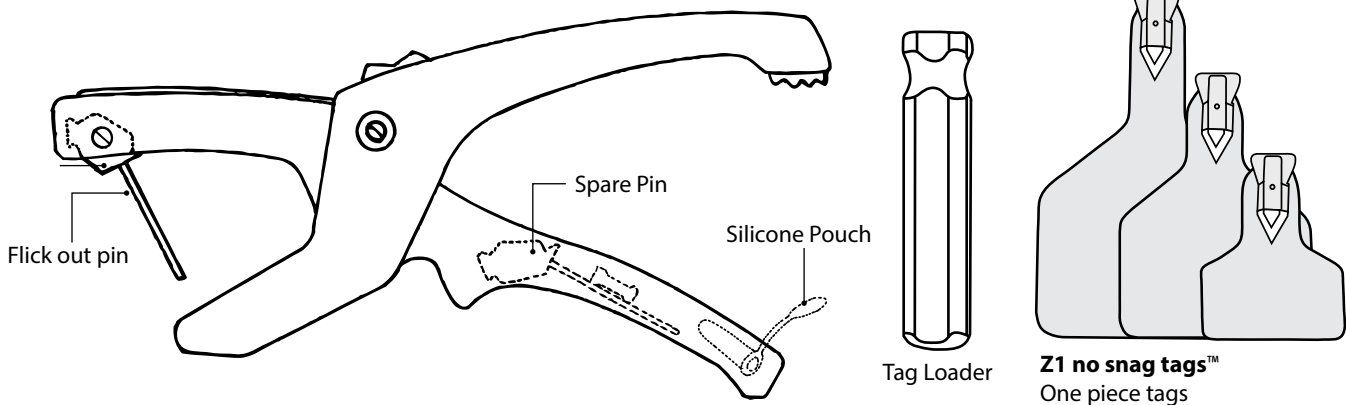


Applying Z1 no snag tags™

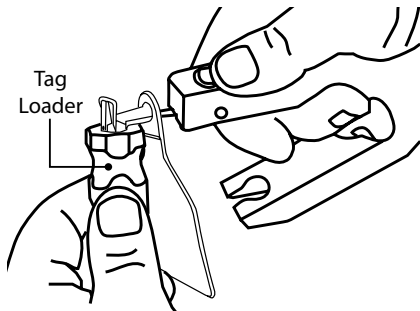


- 1** Flip tagger pin up.
Then insert the tag into the tag loader and push the pin into the head of the tag as shown.

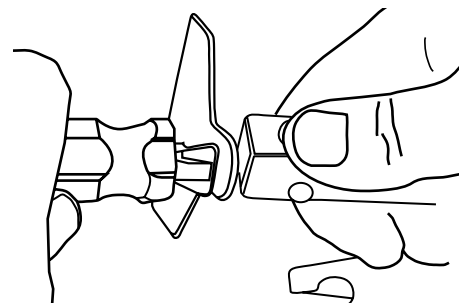

- 2** Lift the loader in an upward arc while pushing towards the tagger.

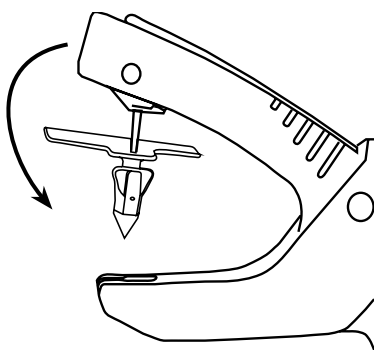

- 3** Flip tagger pin down into tagging position.
Now the tag is ready to apply.

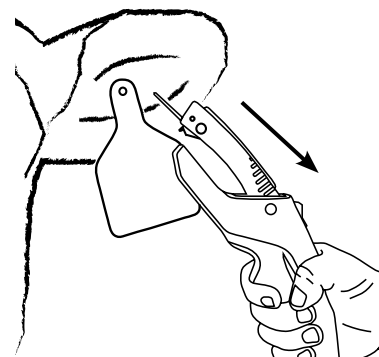

- 4** Remove the tagger without opening handles, pulling tagger away from the animal's ear in one smooth motion.

+ 64 9 414 1790 • info@zeetags.com • www.zeetags.com